

UNIK FLOR



**PREMIUM 4MM
LUXURY VINYL
CLICK**


4.0mm

Premium Durability, Budget-Friendly

0.3mm

*Wear Layer with 3 pass
UV coated*

THE STRUCTURE OF
PREMIUM VINYL CLICK

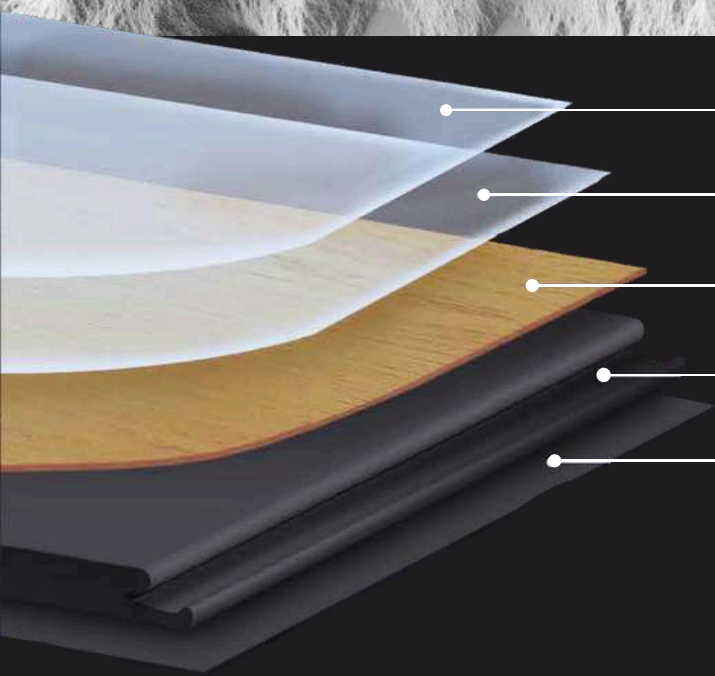

UV Coating

Wear Layer
Thickness: 0.3mm

Decor Films

Virgin Vinyl Core

Bottom Layer

Adjustable Click Lock System

*With improved elasticity,
it's built to handle more challenging conditions.*

No Glue Required for Installation

Quick Click Installation System

*No glue is required to install our
Vinyl Click flooring.*



Luxury for Living & Business





Smooth, Warm, Relaxing

Enjoy enhanced comfort with vinyl's soft and warm surface underfoot.

4mm
RM 2.98
/sqft

Harga Siap
Pasang
RM 4.48
/sqft

AA -V 411

AA -V 412

AA -V 414

AA -V 415

Length : 1220mm
Width : 184mm
Thickness : 4.0mm
Wear Layer : 0.3mm

Package : 10pcs(24.16sqft)
Weight : 20kg
Pallette : 76 carton

4mm
RM 2.98
/sqft

**Harga Siap
Pasang**
RM 4.48
/sqft

AA -V 416

AA -V 410

AA -V 418

Length : 1220mm
Width : 184mm
Thickness : 4.0mm
Wear Layer : 0.3mm

Package : 10pcs(24.16sqft)
Weight : 20kg
Pallette : 76 carton

4mm
RM 2.98
/sqft

**Harga Siap
Pasang**
RM 4.48
/sqft

AA -V 419

AA -V 417

Length : 1220mm
Width : 184mm
Thickness : 4.0mm
Wear Layer : 0.3mm

Package : 10pcs(24.16sqft)
Weight : 20kg
Pallette : 76 carton

AA -V 413

PREMIUM LUXURY VINYL CLICK

Packaging



Product Specification

Size Length: 1220mm Width: 184mm Thickness: 4.0mm			Wear Layer : 0.3mm Package : 10pcs(24.16sqft)	Weight : 20kg Pallette :76 carton
Test Item	Method	Report		
Locking Strenght	ISO 24334: 2017	3.9kN/m		
Peel Strenght	ASTM D903 - 98(2019)	X direction: 50.35N/25mm Y direction: 58.15N/25mm		
Abrasion Resistance	EN 13329 : 20k + A2: 2021 Amex E	0.3 Wear Layer (Abrasion 2500-4000 Revolutions)		
Coefficient of fiction	ASTM D2047-17	0.50		
Dimensional Stability & Curling after Exposure to Heat	ASTM F2199-20	Dimensional Stability: -0.05% Curling Value: -0.20mm		
Size Difference	ASTM F2055-17(2021)	0.01mm+1		
Scracth Resistance	ISO 1518-1: 2019	No worn-out to the surface coating		

PREMIUM 5MM LUXURY VINYL CLICK

5.0_{MM}


Series


0.5_{MM}

Wear Layer with 5 pass
UV coated

Style and Strength in Perfect Harmony

THE STRUCTURE OF
PREMIUM LUXURY VINYL CLICK

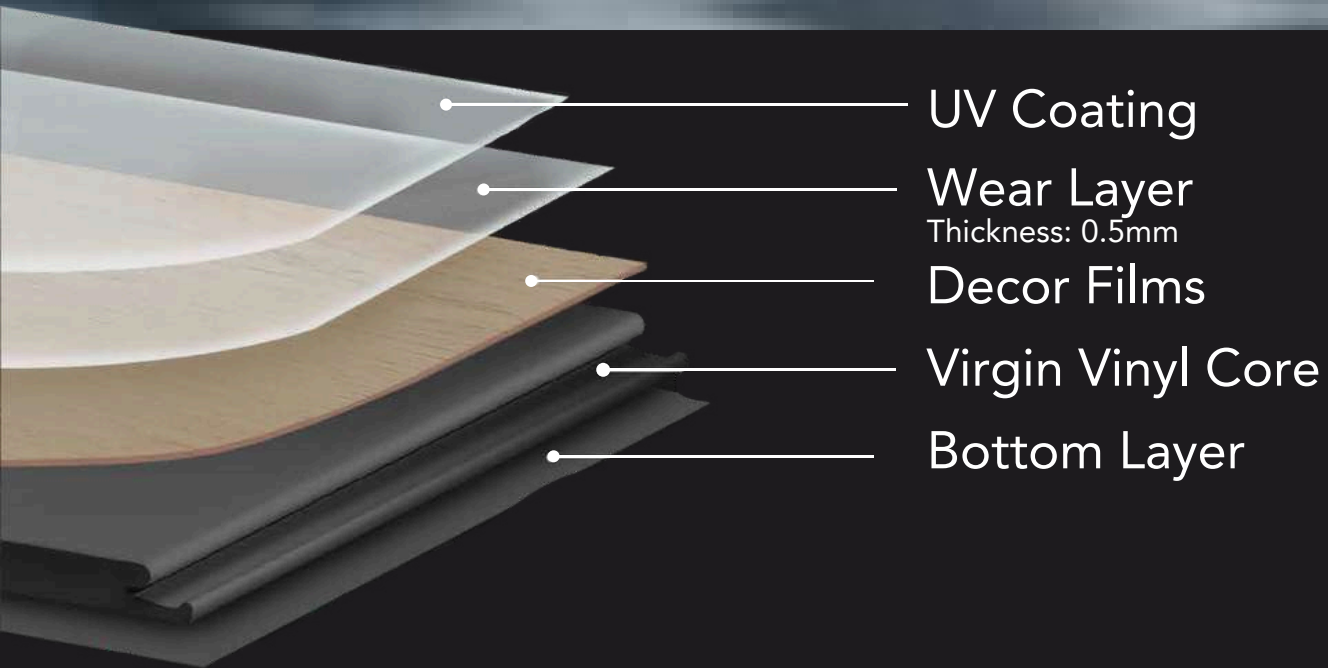

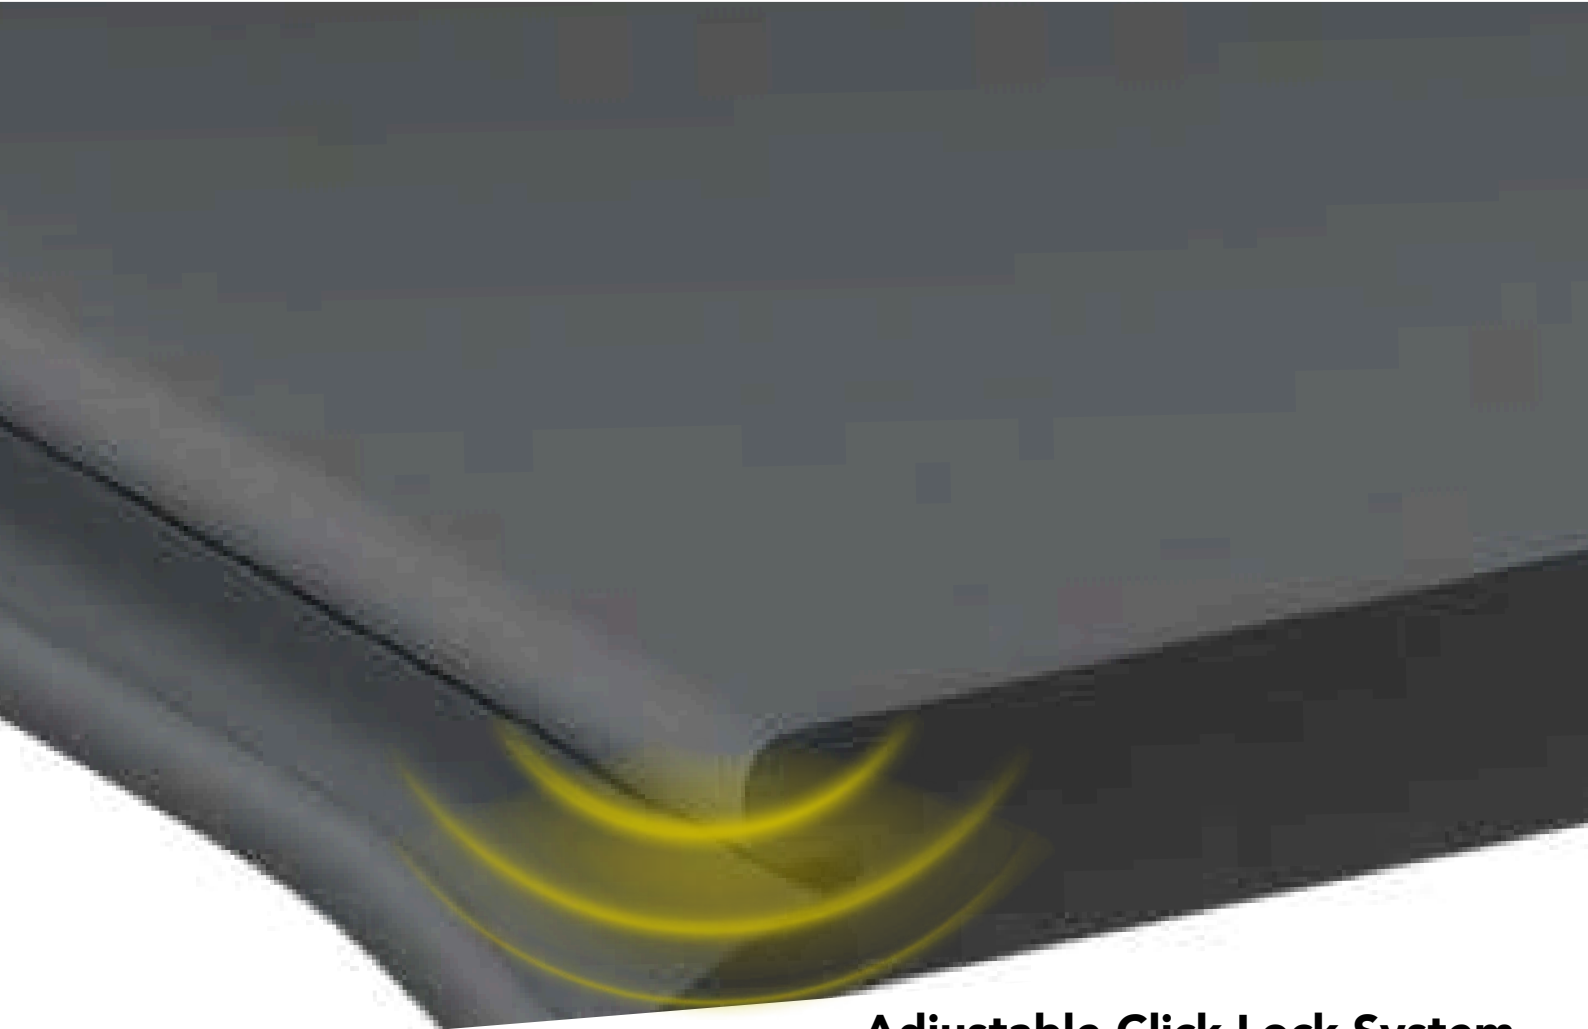

Adjustable Click Lock System

*With improved elasticity,
it's built to handle more challenging conditions.*

No Glue Required for Installation

Quick Click Installation System

*No glue is required to install our
Vinyl Click flooring.*



Smooth, Warm, Relaxing

Enjoy enhanced comfort with vinyl's soft and warm surface underfoot.



Luxury for Living & Business





5mm
RM 3.68
/sqft

**Harga Siap
Pasang**
RM 5.18
/sqft

AA -V 101
COTTON OAK

AA -V 103
EURO OAK

AA -V 104
AMERICAN OAK

AA -V 105
GOLDEN TEAK

Length : 1220mm
Width : 184mm
Thickness : 5.0mm
Wear Layer : 0.5mm
Package : 10pcs(24.16sqft)
Weight : 24kg
Pallet : 66 carton

5mm
RM 3.68
/sqft

**Harga Siap
Pasang**
RM 5.18
/sqft

AA -V 208
CREAM YELLOW
OAK

AA -V 110
COCO CHESNUT

AA -V 203
VICTORIAN ASH

AA -V 107
SIENNA OAK

Length : 1220mm
Width : 184mm
Thickness : 5.0mm
Wear Layer : 0.5mm
Package : 10pcs(24.16sqft)
Weight : 24kg
Pallet : 66 carton



5mm
RM 3.68
/sqft

**Harga Siap
Pasang**
RM 5.18
/sqft

AA -V 207
OFF-WHITE OAK

AA -V 106
EUROPE OAK

AA -V 108
CREAMY OAK

AA-V109
BAMBOO OAK

Length : 1220mm
Width : 184mm
Thickness : 5.0mm
Wear Layer : 0.5mm
Package : 10pcs(24.16sqft)
Weight : 24kg
Pallet : 66 carton

PREMIUM HERRINGBONE 5MM LUXURY VINYL CLICK

5.0_{MM}

Series

0.5_{MM}

Wear Layer with 5 pass
UV coated

Style and Strength in Perfect Harmony

HERRINGBONE



**5mm
Herringbone
RM 3.28
/sqft**

**Harga Siap
Pasang
RM 4.78
/sqft**

Length : 640mm
Width : 128mm
Thickness: : 5.0mm :
WearLayer 0.5mm
Package : 16pcs (14.11sqft)
with A+B Mixed
Weight : 14kg
Pallet : 97 carton

HV201
WICKSCHEROAK

HV202
HIGHLAND OAK

HV205
RHINE OAK

V551
WHITE OAK

HERRINGBONE



**5mm
Herringbone
RM 3.28
/sqft**

**Harga Siap
Pasang
RM 4.78
/sqft**

Length : 640mm
Width : 128mm
Thickness: : 5.0mm :
WearLayer 0.5mm
Package : 16pcs (14.11sqft)
with A+B Mixed
Weight : 14kg
Pallet : 97 carton

HV552
ASH WOOD

HV553
WOOD WHITE

HV554
CREAM OAK

HERRINGBONE



**5mm
Herringbone
RM 3.28
/sqft**

**Harga Siap
Pasang
RM 4.78
/sqft**

Length : 640mm
Width : 128mm
Thickness: : 5.0mm :
WearLayer 0.5mm
Package : 16pcs (14.11sqft)
with A+B Mixed
Weight : 14kg
Pallet : 97 carton

HV555
WHITE GREY

HV556
LONE OAK

HV557
MYSTIC WALNUT

PREMIUM LUXURY VINYL CLICK

Packaging



Product Specification

Length	: 1220mm	Package	: 10pcs(24.16sqft)
Width	: 184mm	Weight	: 24kg
Thickness	: 5.0mm		
Wear Layer	: 0.5mm	Pallet	: 66 carton

Herringbone Type			
Length	:640mm	Package	: 16pcs(14.11sqft)
Width	:128mm		with A+B Mixed
Thickness	: 5.0mm	Weight	: 14kg
Wear Layer	:0.5mm	Pallet	: 97 carton

Test Item	Method	Report
Coefficient of fiction	ASTM D2047-17	0.53
Locking Strenght	ISO 24334: 2017	4.5kN/m
Peel Strenght	ASTM D903 - 98(2019)	X direction: 53.35N/25mm Y direction: 61.45N/25mm
Dimensional Stability & Curling after Exposure to Heat	ASTM F2199-20	Dimensional Stability: -0.04% Curling Value: -0.18mm
Abrasion Resistance	EN 13329 : 20k + A2: 2021 Amex E	0.5 Wear Layer (Abrasion 5000-7000 Revolutions)
Scrath Resistance	ISO 1518-1: 2019	No worn-out to the surface coating
Size Difference	ASTM F2055-17(2021)	0.01mm+1